


SHURE®

LEGENDARY
PERFORMANCE™

VP Camera-Mount
Shotgun Microphones

AUDIO, IN FOCUS.

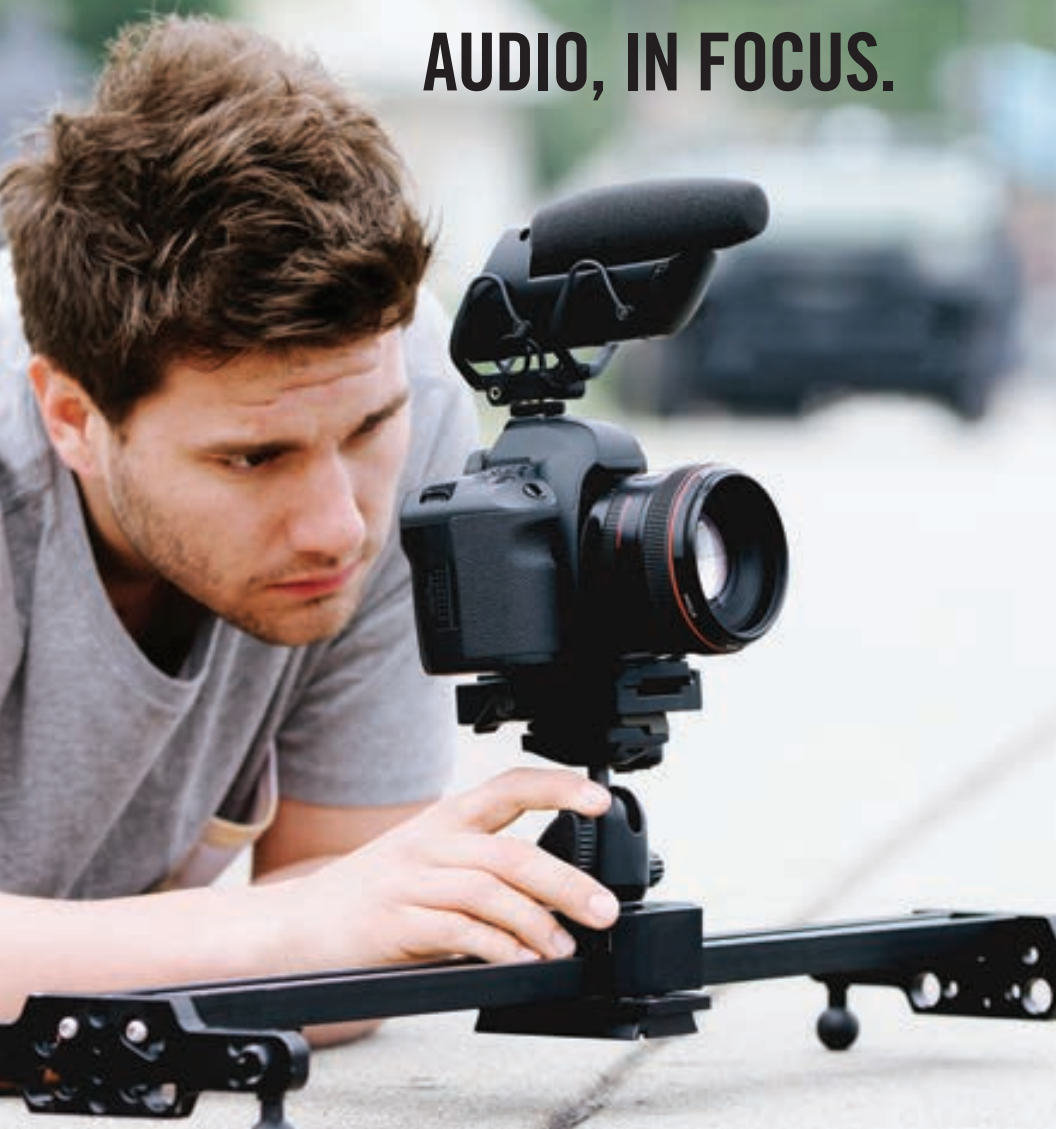

VP83F

LensHopper™ FLASH

Camera-Mount Shotgun Microphone with Integrated Flash Recording

Compact, rugged microphone for high-definition audio capture + integrated digital flash recording with DSLR cameras and HD camcorders.



VP83F LCD Screen and Controls



50Hz–20kHz

- Detailed, high-definition audio with full low-end response
- Integrated digital flash recording (MicroSDHC, up to 32 GB) for WAV file capture at 24-bit/48 kHz sampling rate
- One-touch record button
- Dedicated headphone audio output for real-time headphone monitoring
- Intuitive menu and controls with five-position joystick and back-lit LCD screen
- Low cut filter & mic gain adjustments
- Integrated Rycote® Lyre® mount for robust shock isolation
- 10 hours battery life (record mode) from 2 AA alkaline batteries (included)
- Durable, all-metal construction with superior RF immunity
- Detachable 3.5 mm audio connector and foam windscreen included

VP83

LensHopper™

Camera-Mount Shotgun Microphone

Ultra-compact, rugged microphone for high-definition audio capture with DSLR cameras and HD camcorders.



VP83 Controls



50Hz–20kHz

- Detailed, high-definition audio with full low-end response
- Easily accessible controls including three-position gain and low-cut filter switch
- Integrated Rycote® Lyre® mount for robust shock isolation
- 130 hours battery life from 1 AA alkaline battery (included)
- Durable, all-metal construction with superior RF immunity
- Attached 3.5 mm audio connector and foam windscreen included

Accessories for VP83F and VP83

Foam Windscreen
A83-W





Windjammer®
A83-FUR





Technical Specifications

VP83F



Type	Electret Condenser
Frequency Response	50 - 20,000 Hz
Polar Pattern	Supercardioid/lobar
Output Impedance	Camera: 47 Ω Headphones: 5 Ω
Connector Type	Camera: 3.5 mm (1/8") dual mono, unbalanced Headphones: 3.5 mm (1/8") dual mono
Power Requirements	2 AA batteries (Alkaline, NiMH, Lithium)
Battery Life	10 hours (record mode) from 2 AA alkaline batteries
Construction	Die-cast metal alloy body, satin-black finish
Net Weight	215 g (7.6 oz)

VP83



Type	Electret Condenser
Frequency Response	50 - 20,000 Hz
Polar Pattern	Supercardioid/lobar
Output Impedance	171 Ω
Connector Type	3.5 mm (1/8") dual mono, unbalanced
Power Requirements	1 AA battery (Alkaline, NiMH, Lithium)
Battery Life	130 hours from 1 AA alkaline battery
Construction	Die-cast metal alloy body, satin-black finish
Net Weight	133 g (4.7 oz.)

**United States, Canada,
Latin America, Caribbean:**
Shure Incorporated
5800 West Touhy Avenue
Niles, IL 60714-4608 USA

Phone: 847-600-2000
Fax: 847-600-1212 (USA)
Fax: 847-600-6446
Email: info@shure.com

Europe, Middle East, Africa:
Shure Europe GmbH
Jakob-Dieffenbacher-Str. 12,
75031 Eppingen, Germany

Phone: 49-7262-92490
Fax: 49-7262-9249114
Email: info@shure.de

Asia, Pacific:
Shure Asia Limited
22/F, 625 King's Road
North Point, Island East
Hong Kong

Phone: 852-2893-4290
Fax: 852-2893-4055
Email: info@shure.com.hk

SHURE[®]
LEGENDARY
PERFORMANCE[™]